

# 29" WIDE x 34" DEEP

## FEATURES AND BENEFITS

### Reversible Doors

Front & Rear doors manufactured with spring loaded hinges to change door swing in the field from right or left hand hinge options. Critical when connecting enclosures together.

### Lift off Side Panels

Flush surface lock, quick disconnect lift off side panels.

### Cable Gland Plate

Adjustable bottom plate to minimize dirt & dust entering the enclosure.

### Cable Access Top


Rubber gland access, 14.25" x 4" prevents dust from entering.

### Rear Cable Plates

Two 3 7/8" x 8 1/2" openings for cable access plates with removable plates and edge grommet kit. Also two 1.75" capped openings.


### Tempered Safety Glass

Strengthens door  
Enhances overall look  
No static discharge  
Non combustible material  
Tinted bronze  
Easy cleaning/Non scratching

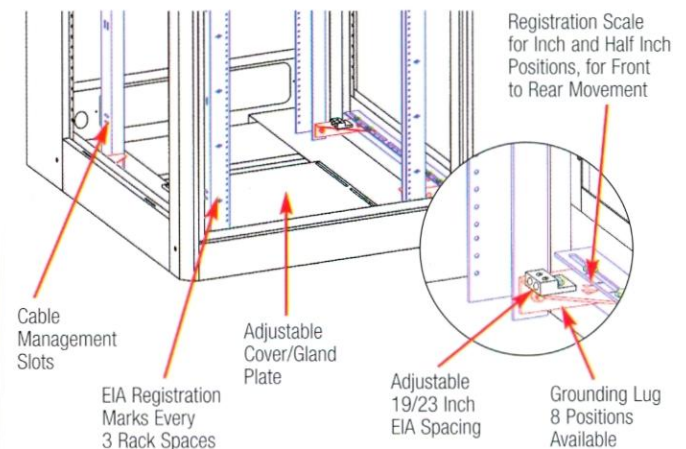

### Sliding mounting rails

Mounting rails can be adjusted after installation to allow for cable management and different depths of equipment without removing terminated equipment.

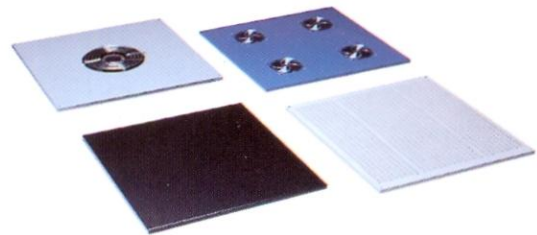

### Optional Tops/Cooling

- 10" Diameter fan (550 CFM)
- 4" Diameter fan (Four = 320 CFM)
- Solid
- Vented